



Franklin Electric

SERIE SP


150 GPM

ACERO INOX

RANGO : 100 - 200 GPM

DESCARGA: 3" NPT


DIÁMETRO NOMINAL 6"

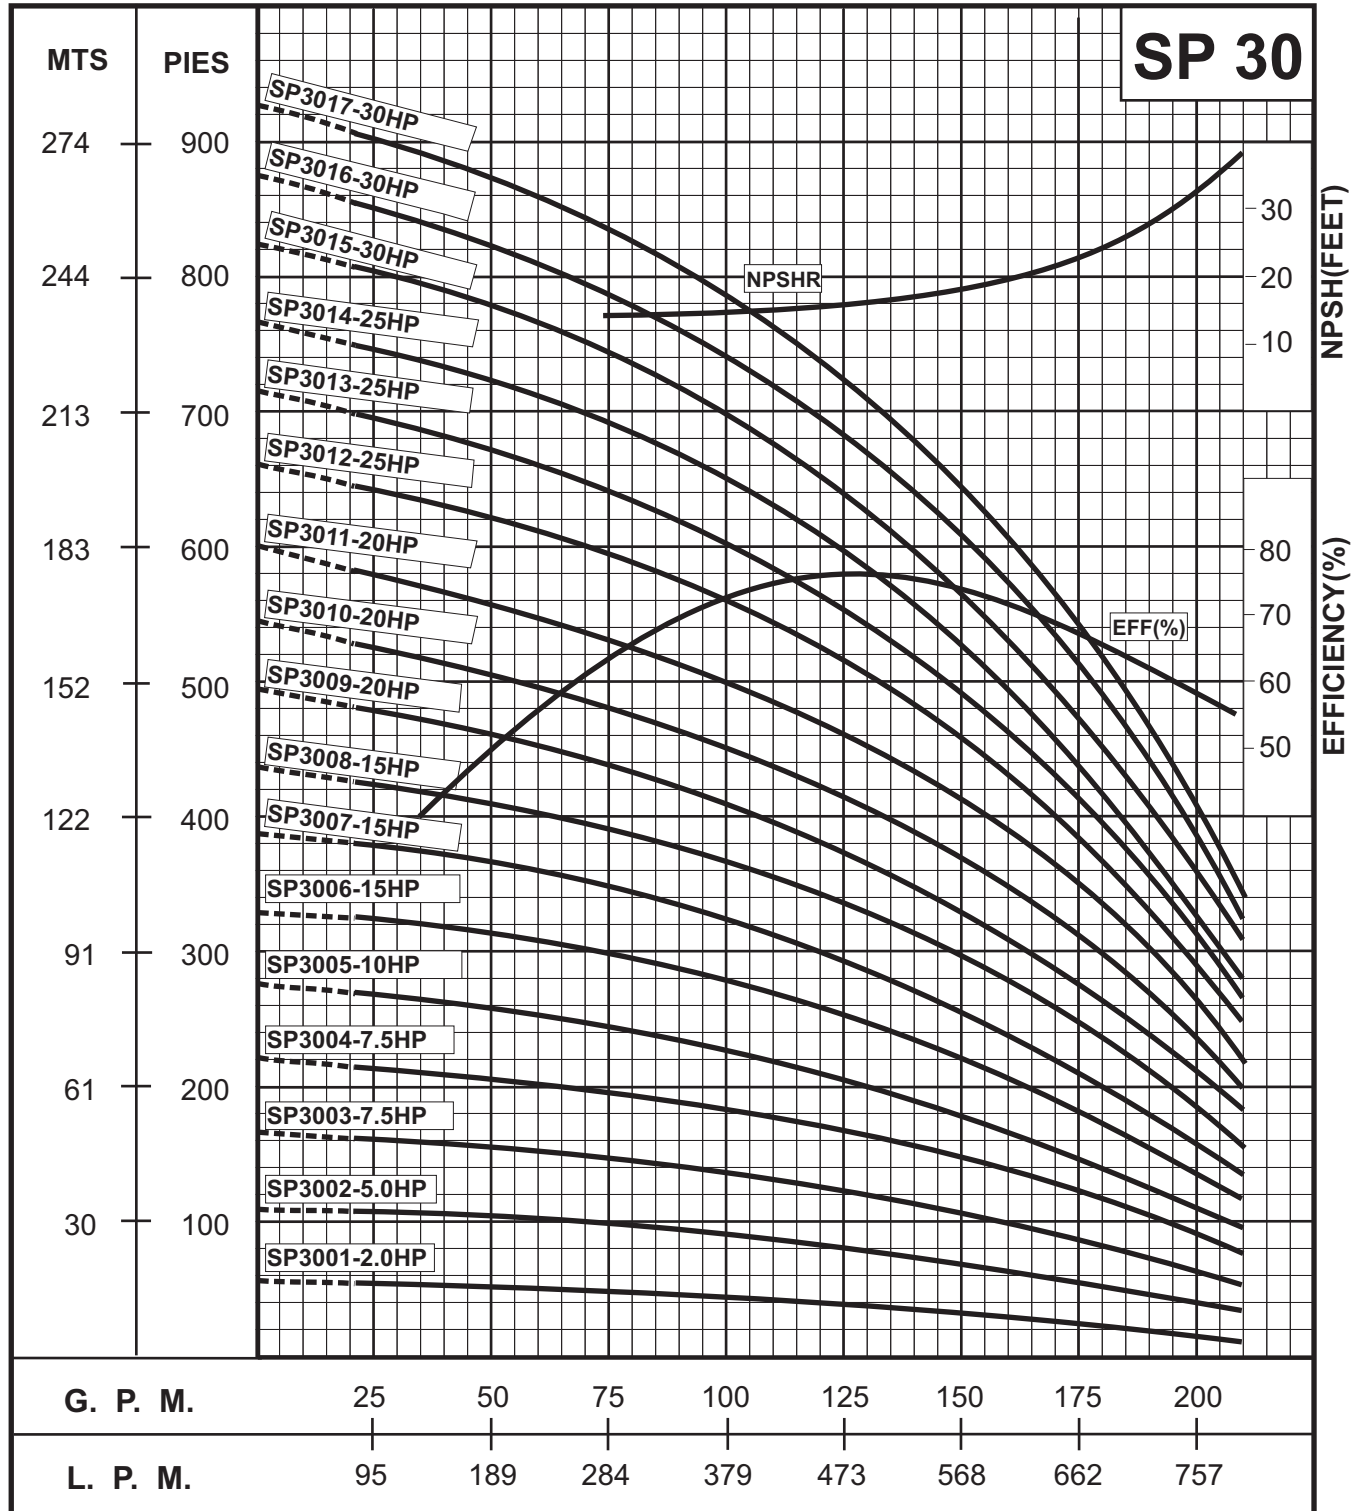

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE. Performance conforms to ISO 2548 annex B
6" MOTOR STANDARD, 3450 RPM. @ 5 ft. Min. Submergence.



SERIE SP	150 GPM	ACERO INOX
-----------------	----------------	-------------------

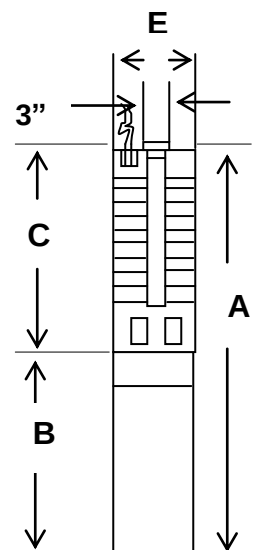

MODEL	HP	DIMENSIONS IN INCHES		MAX. WINDTH (E)	APROX.MT. (LBS)
		A	B		
SP3002(4")	5.0	41.1	23.6	5.4	75
SP3003(4")	7.5	50.9	29.6	5.4	92
SP3004(4")	7.5	54.7	29.6	5.4	97
SP3005	10	54.9	25.4	5.6	148
SP3006	15	61.3	28.0	5.6	167
SP3007	15	65.0	28.0	5.6	169
SP3008	15	68.8	28.0	5.6	174
SP3009	20	75.2	30.6	5.6	191
SP3010	20	79.0	30.6	5.6	193
SP3011	20	82.8	30.6	5.6	198
SP3012	25	89.0	33.1	5.6	235
SP3013	25	92.8	33.1	5.6	238
SP3014	25	96.6	33.1	5.6	242
SP3015	30	103.0	35.7	5.6	260
SP3016	30	106.8	35.7	5.6	262
SP3017	30	110.5	35.7	5.6	266

COMPONENT	MATERIAL OF CONSTRUCTIONS
Check Valve Housing	304 Stainless Steel
Check Valve	304 Stainless Steel
Diffuser Chamber	304 Stainless Steel
Split Cone Nut	304 Stainless Steel
Split Cone	304 Stainless Steel
Impeller	304 Stainless Steel
Suction Interconnector	304 Stainless Steel
Inlet Screen	304 Stainless Steel
Seal Ring Support Plate	304 Stainless Steel
Straps	304 Stainless Steel
Cable Guard	304 Stainless Steel
Priming Inducer	304 Stainless Steel
Coupling	329/431 Stainless Steel
Coupling Key	302/304 Stainless Steel
Pump Shaft	431 Stainless Steel
Intermediate Bearings	NBR
Impeller Seal Ring	NBR/PPS
Check Valve Seat	NBR/316 Stainless Steel
Top Bearing	NBR/304 Stainless Steel
Upthrust Disc	Carbon/Graphite
Upthrust Stop Washer	304 Stainless Steel