





**4", 6" SUPER
STAINLESS STEEL
SUBMERSIBLE
DEEP WELL PUMPS**

60HZ



4" SUPER STAINLESS STEEL SUBMERSIBLE DEEP WELL PUMPS



Basic Features

- Non-polluting, corrosion resistant, Stainlesssteel construction inside and out.
- The smooth safety hook will prevent the rope from abading.
- The built-in jam-free stainless steel check valve can effectively prevent backflow of water in the pipe from affecting pump performance when the motor is not operating.
- Precision stainless steel intermediate chamber can help maintain optimum performance even when water pressure is greatest.
- The high-performance, high efficecy stainless steel impeller is one of the special features of this product. It is incomparably superior to ordinary plastic or brass impellers in terms of abrasion resistance and service life.
- The stainless steel strainer can prevent the entry of sand or other extraneous material.

Construction Material

Model	SP-5, 10 & 18	SP-25	SP-40 & SP-75
discharge	1-1/4"	1-1/2"	2"
pump O.D.	4"(98.5mm)		
Stages & Impeller	#304 SST		
Pump Shaft	#304 SST	# 431 SST	
Pump Bearing	Buna-N Rubber		
Lead Guard	#304 SST		
Strainer & Check Valve	#304 SST		
motor	4" Franklin Motor		



SERIE SP

10GPM

ACERO INOX. 304

RANGO: 7-13 GPM

DESCARGA: 1-1/4" NPT

DIAMETRO NOMINAL. 4"

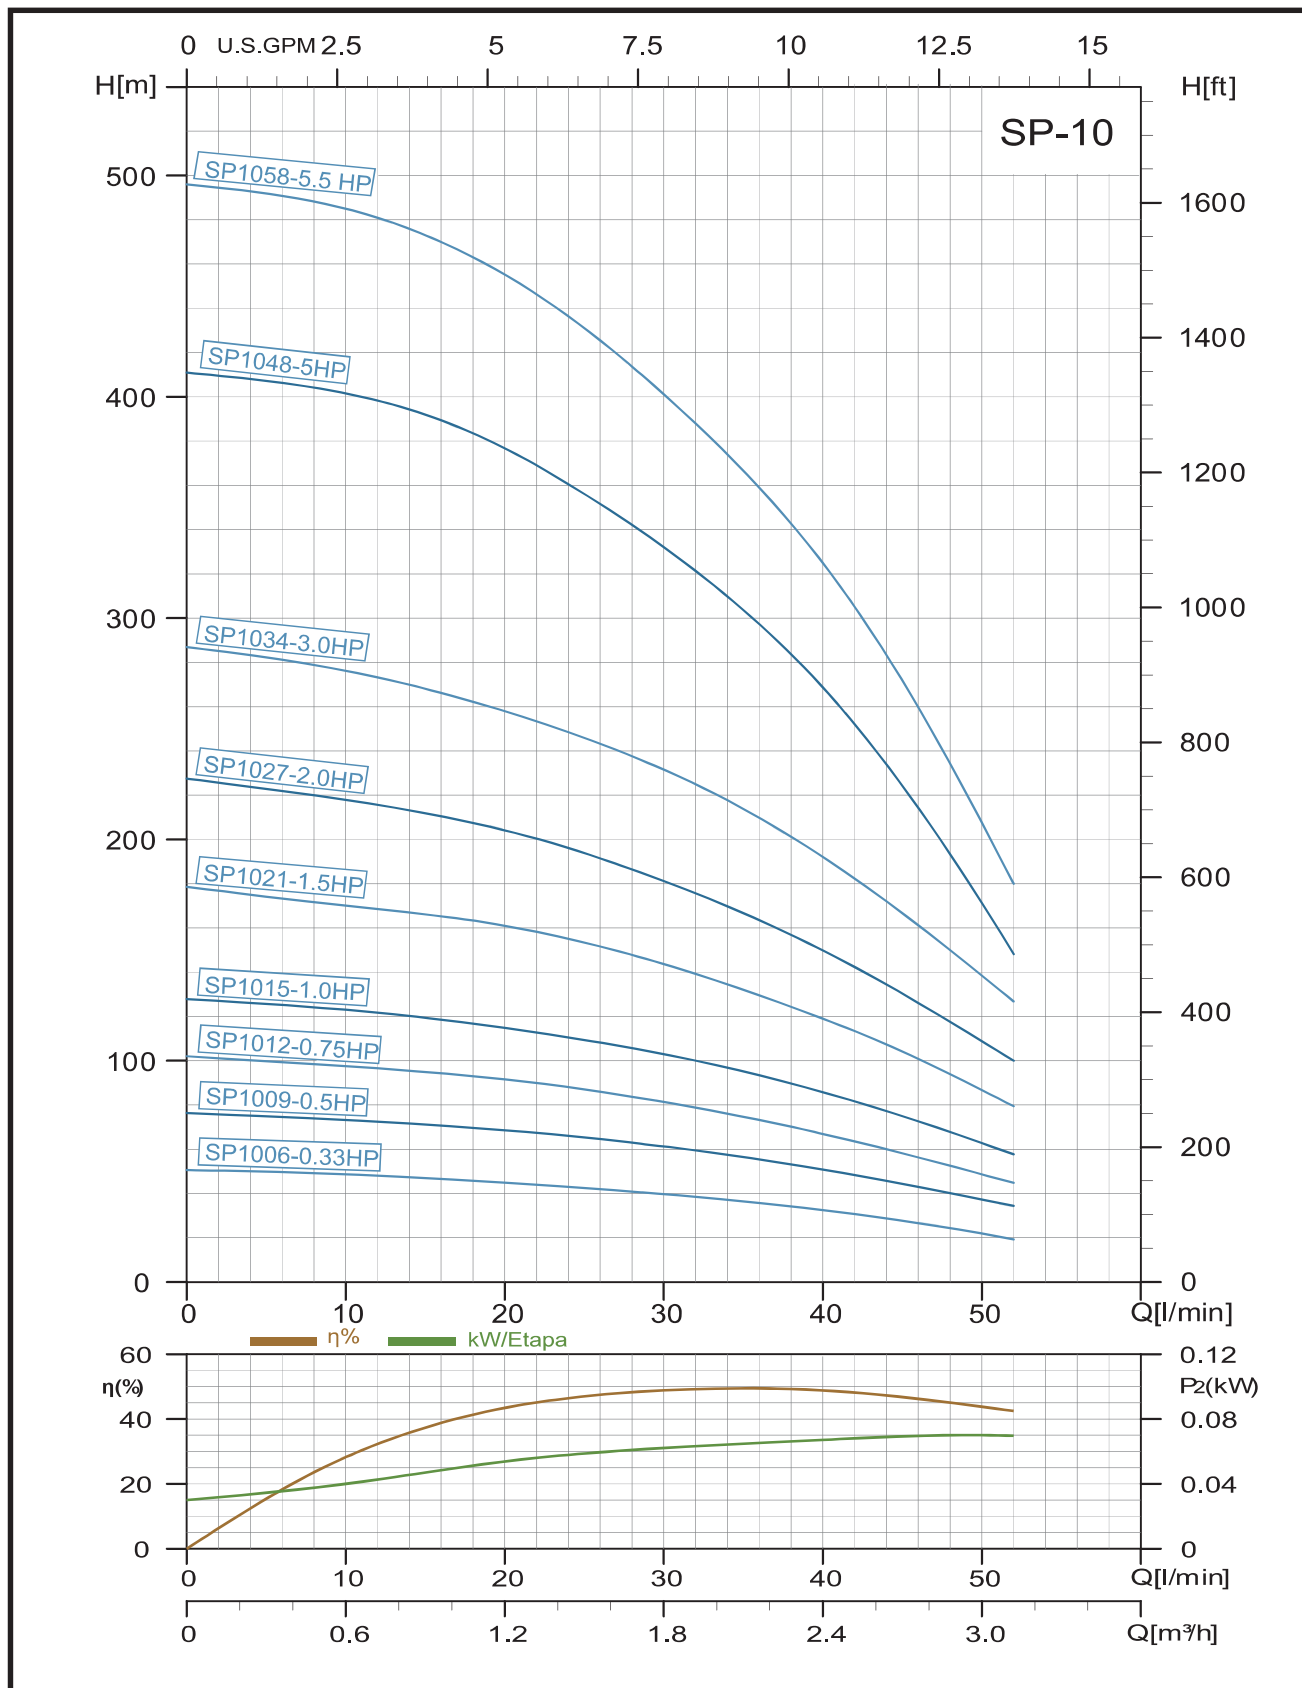


Tabla de selección

60Hz

Modelo	Motor		Capacidad: Q - 3450 rpm							
	P2		l/min m³/h	0	20	25	30	35	40	50
	KW	HP		0	1.2	1.5	1.8	2.1	2.4	3.0
SP-1006	0.25	0.33	Cabeza en metros	51	45	42	40	36	32	21
SP-1009	0.37	0.5		77	69	65	61	56	51	37
SP-1012	0.55	0.75		102	92	87	81	75	67	49
SP-1015	0.75	1		128	115	109	103	95	86	63
SP-1021	1.1	1.5		179	160	153	144	132	119	87
SP-1027	1.5	2		227	204	194	181	167	150	109
SP-1034	2.2	3		287	258	246	231	214	192	138
SP-1048	4	5.5		411	376	356	331	303	268	171
▶ SP-1058	4	5.5		496	455	431	401	367	325	207

*Para bombas de alta presión, hasta 58 etapas, disponibles bajo pedido.

▶ Bomba SP-1058 con camisa de 5" en acero inoxidable 304.

Dimensiones y pesos

Modelo	Motor Dia.	Dimensiones (mm)		Peso neto (Kg) Pump
		A	C	
SP-1006	4"	293	98	2.4
SP-1009	4"	356	98	3
SP-1012	4"	419	98	3.6
SP-1015	4"	482	98	4.2
SP-1021	4"	608	98	5.3
SP-1027	4"	734	98	6.4
SP-1034	4"	904	98	10
SP-1048	4"	1198	98	11.5
▶ SP-1058	4"	1766	133	33.9

C = Diámetro de la bomba y el motor, incluyendo el guardacable.

▶ Bomba SP-1058 con camisa de 5" en acero inoxidable 304

