




**4", 6" SUPER
STAINLESS STEEL
SUBMERSIBLE
DEEP WELL PUMPS**

60HZ



4" SUPER STAINLESS STEEL SUBMERSIBLE DEEP WELL PUMPS



Basic Features

- Non-polluting, corrosion resistant, Stainlesssteel construction inside and out.
- The smooth safety hook will prevent the rope from abading.
- The built-in jam-free stainless steel check valve can effectively prevent backflow of water in the pipe from affecting pump performance when the motor is not operating.
- Precision stainless steel intermediate chamber can help maintain optimum performance even when water pressure is greatest.
- The high-performance, high efficecy stainless steel impeller is one of the special features of this product. It is incomparably superior to ordinary plastic or brass impellers in terms of abrasion resistance and service life.
- The stainless steel strainer can prevent the entry of sand or other extraneous material.

Construction Material

Model	SP-5, 10 & 18	SP-25	SP-40 & SP-75
discharge	1-1/4"	1-1/2"	2"
pump O.D.	4"(98.5mm)		
Stages & Impeller	#304 SST		
Pump Shaft	#304 SST	#431 SST	
Pump Bearing	Buna-N Rubber		
Lead Guard	#304 SST		
Strainer & Check Valve	#304 SST		
motor	4" Franklin Motor		



SERIE SP


18GPM

ACERO INOX. 304

RANGO: 13 - 20 GPM

DESCARGA: 1-1/4" NPT

DIAMETRO NOMINAL: 4"

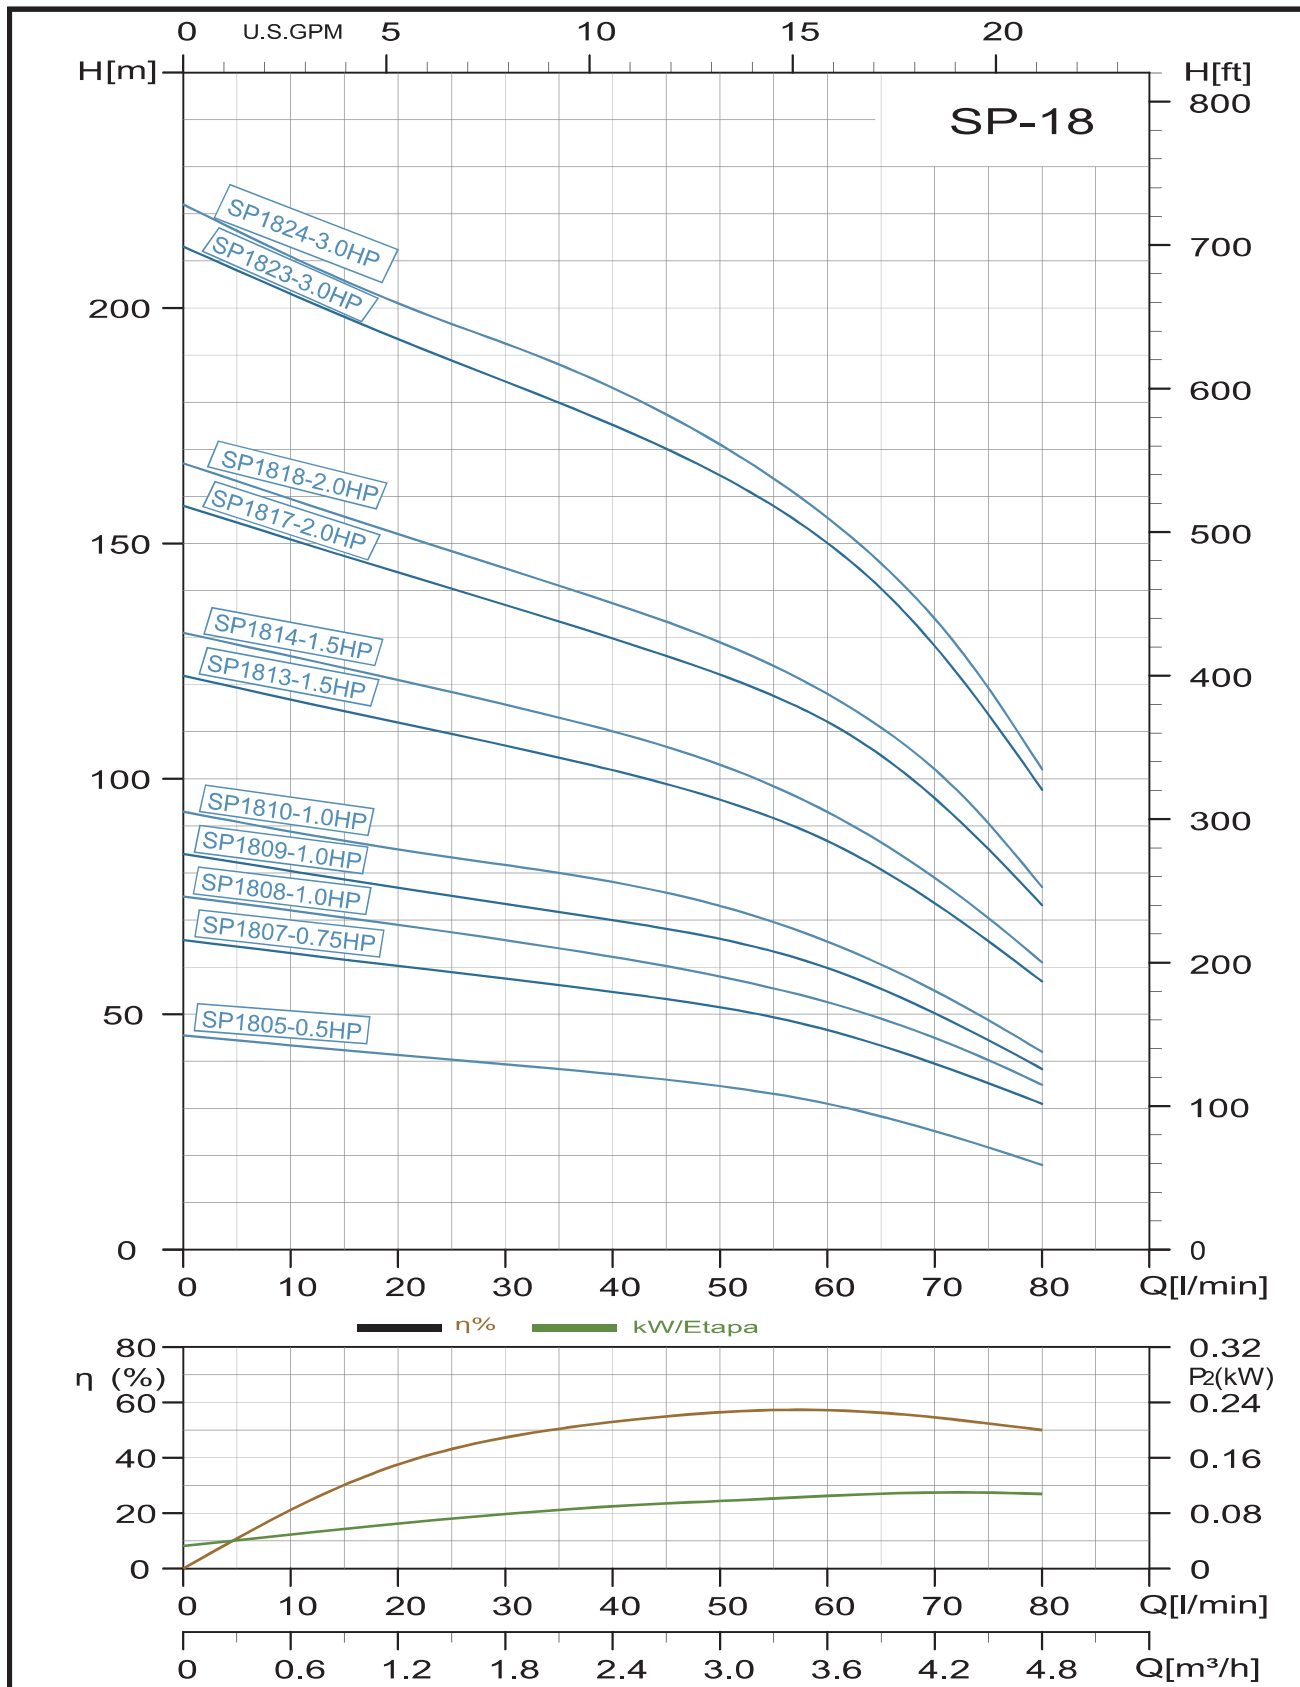

SERIE SP

18GPM

ACERO INOX. 304

RANGO: 13 - 20 GPM

DESCARGA: 1-1/4" NPT

DIAMETRO NOMINAL: 4"

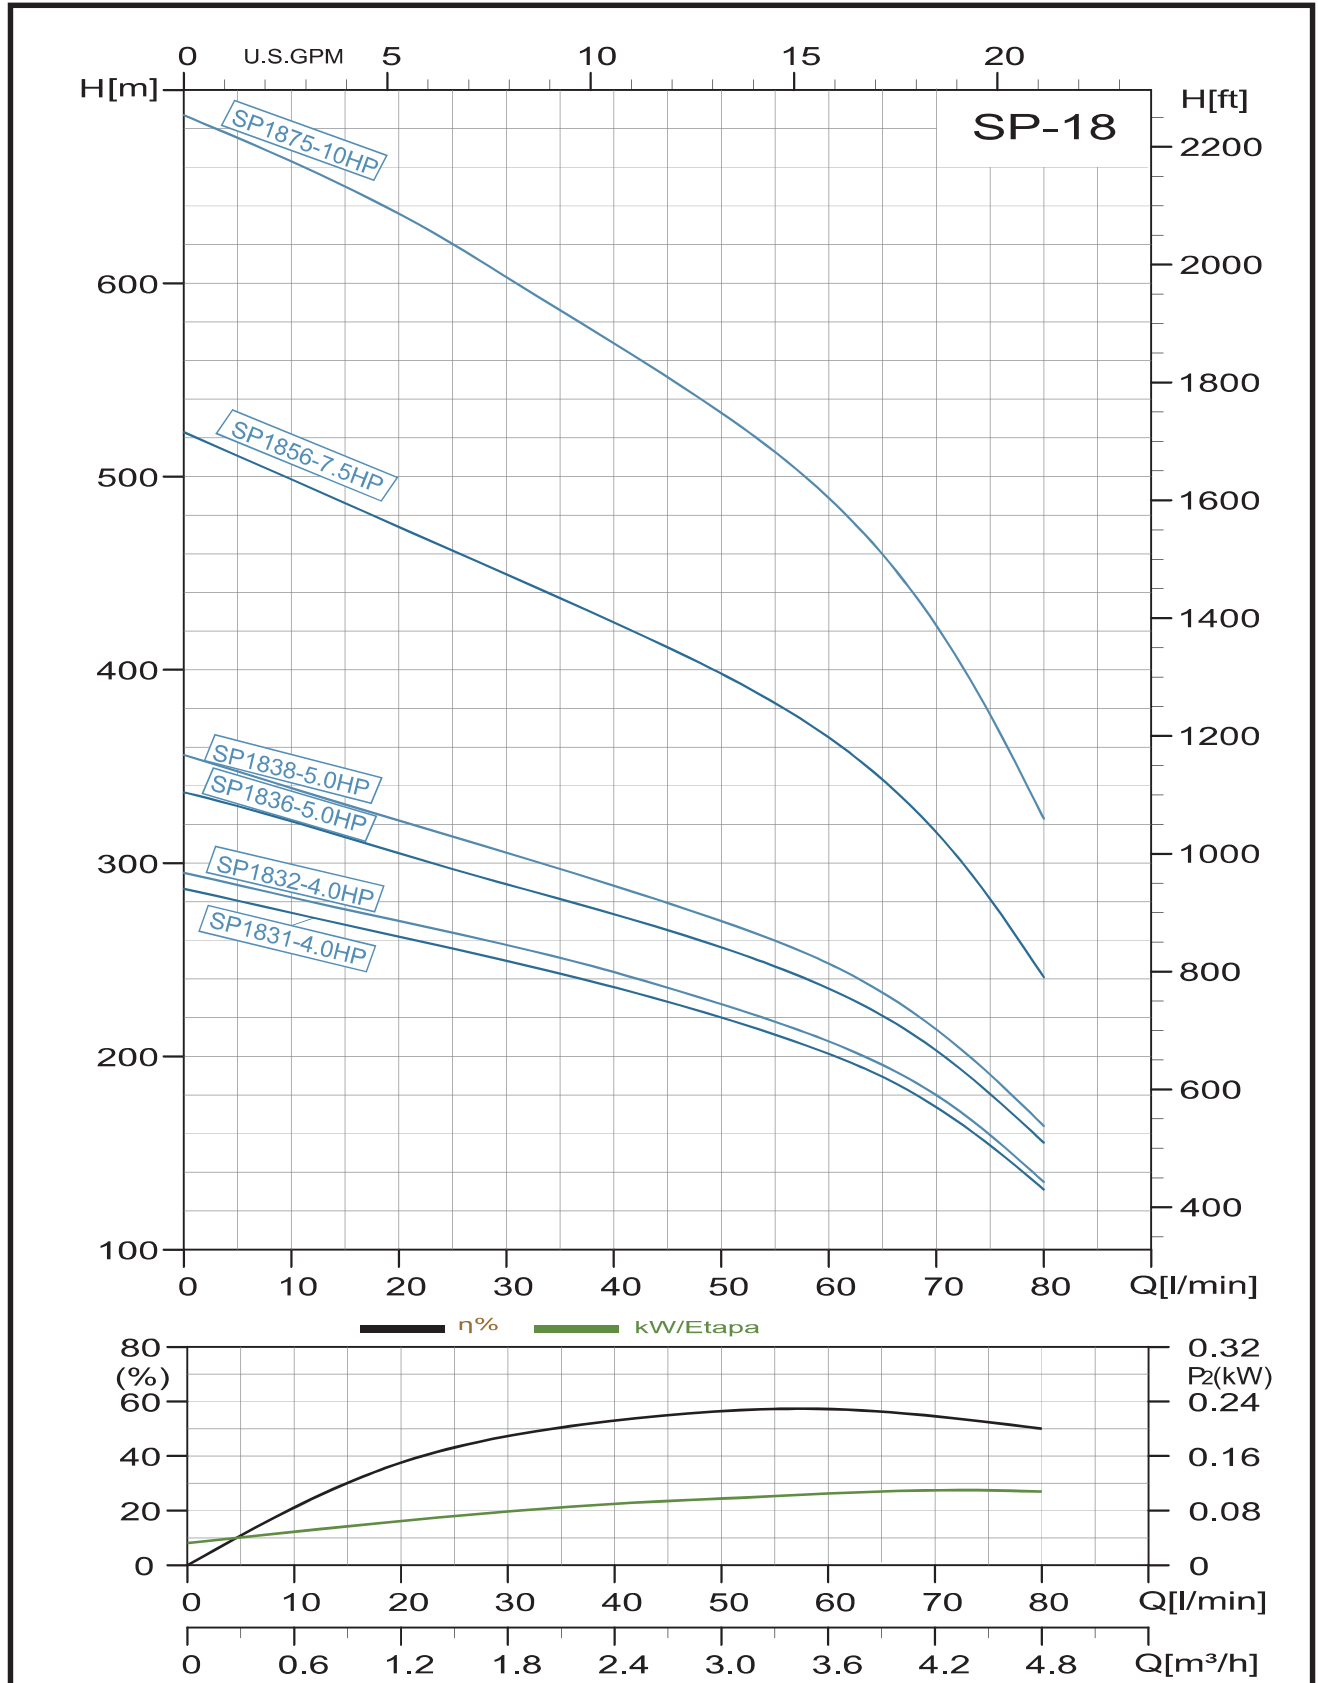


Tabla de selección

60Hz

Modelo	Motor		Capacidad: Q - 3450 rpm							
	P2		l/min m³/h	0	35	40	50	60	70	80
	KW	HP		0	2.1	2.4	3.0	3.6	4.2	4.8
SP-1805	0.37	0.5	CABEZA EN METROS	46	38	37	35	31	25	18
SP-1807	0.55	0.75		66	56	55	51	47	39	31
SP-1808	0.75	1		75	64	63	58	54	45	35
SP-1809	0.75	1		84	72	70	66	60	50	38
SP-1810	0.75	1		93	80	77	73	66	55	42
SP-1813	1.1	1.5		122	105	102	96	87	73	57
SP-1814	1.1	1.5		131	113	110	103	94	79	61
SP-1817	1.5	2		158	133	130	122	112	96	73
SP-1818	1.5	2		167	141	138	129	119	102	77
SP-1823	2.2	3		213	180	175	164	150	128	98
SP-1824	2.2	3		222	188	183	171	157	134	102
SP-1831	3	4		286	243	236	220	201	174	131
SP-1832	3	4		295	251	244	227	207	180	135
SP-1836	3.7	5		337	281	274	256	235	203	155
SP-1838	3.7	5		356	297	287	270	248	214	164
▶ SP-1856	5.5	7.5		522	437	425	398	365	316	241
▶ SP-1875	7.5	10		687	586	569	533	489	423	323

*Para bombas de alta presión, hasta 75 etapas, disponibles bajo pedido.

▶ Con camisa de 5" en acero inoxidable 304.

Dimensiones y pesos

Modelo	Motor Dia.	Dimensiones (mm)		Peso neto (Kg) Pump
		A	C	
SP-1805	4"	272	98	2.3
SP-1807	4"	314	98	2.6
SP-1808	4"	335	98	2.8
SP-1809	4"	356	98	3.0
SP-1810	4"	377	98	3.2
SP-1813	4"	440	98	3.8
SP-1814	4"	461	98	4.0
SP-1817	4"	524	98	4.5
SP-1818	4"	545	98	4.7
SP-1823	4"	650	98	5.7
SP-1824	4"	671	98	5.9
SP-1831	4"	841	98	9.2
SP-1832	4"	862	98	9.5
SP-1836	4"	946	98	10.5
SP-1838	4"	988	98	11
▶ SP-1856	4"	1724	133	34
▶ SP-1856	6"	1741	140	34
▶ SP-1875	6"	1951	140	41.8

C = Diámetro de la bomba y el motor, incluyendo el guardacable.

▶ Bombas SP-1856 y SP-1875 con camisa de 5" en acero inoxidable 304

